


## Teknisk info

### Exemplary configuration

#### Configuration example 1:

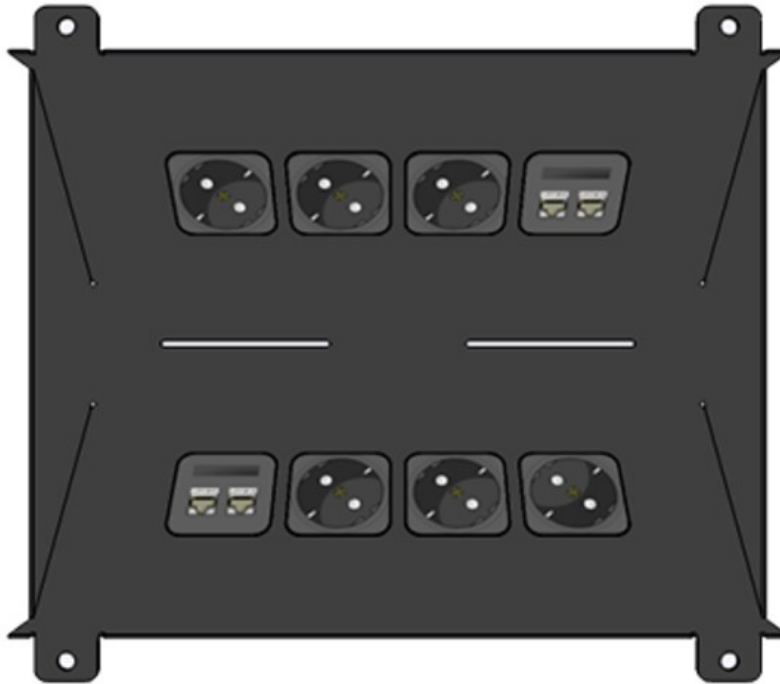

The unit is operable from both sides, the cover is released by push-to-open mechanism and is slowed down at closing.

#### Casing:

The cable exit is silver.

#### Cutout dimension:

291,4 x 210,4 mm

#### Power supply:

Socket box 1 + 2: Male GST 18/3, NO output!

**Wiring:**  
1,5 mm<sup>2</sup>


**Fitting:**

**Socket box 1 + 2:**

**3 x Schuko-enhanced contact protection (diagonal)**

**2 x RJ45 Cat. 6 shielded gender-changer. Input data: 2 x RJ45-female-female-connector, w/o cables**

**Configuration example 2:**

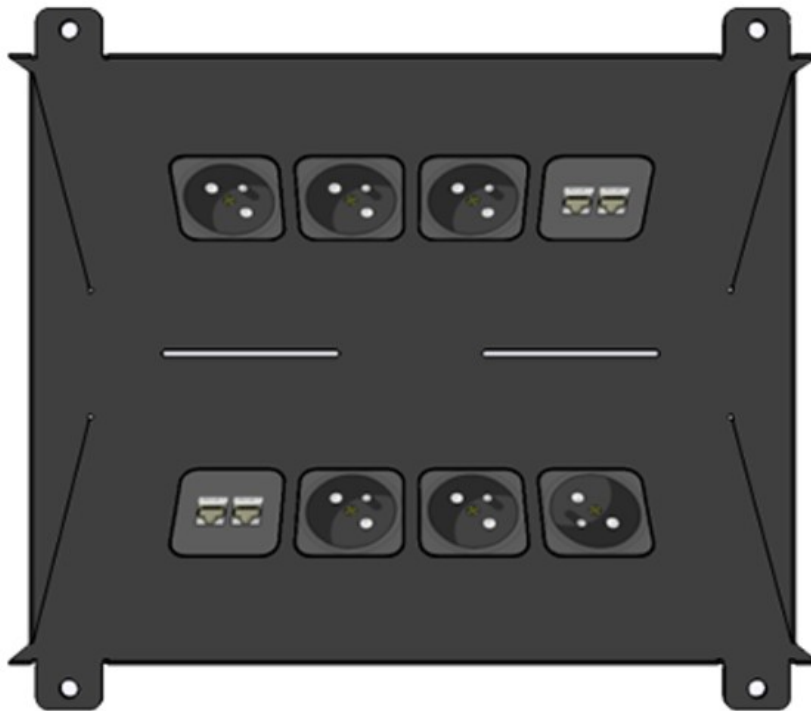

**The unit is operable from both sides, the cover is released by push-to-open mechanism and is slowed down at closing.**

**Casing:**

**The cable exit is silver.**


**Cutout dimension:**  
291,4 x 210,4 mm

**Power supply:**  
Socket box 1 + 2: Male GST 18/3, NO output!

**Wiring:**  
1,5 mm<sup>2</sup>

**Fitting:**  
Socket box 1 + 2:  
3 x BEK (diagonal)  
2 x RJ45 Cat. 6 shielded (Nexans). Input data: 2 x patch-cord with male RJ45-connector, cable length app. 3500 mm

**Configuration example 3:**

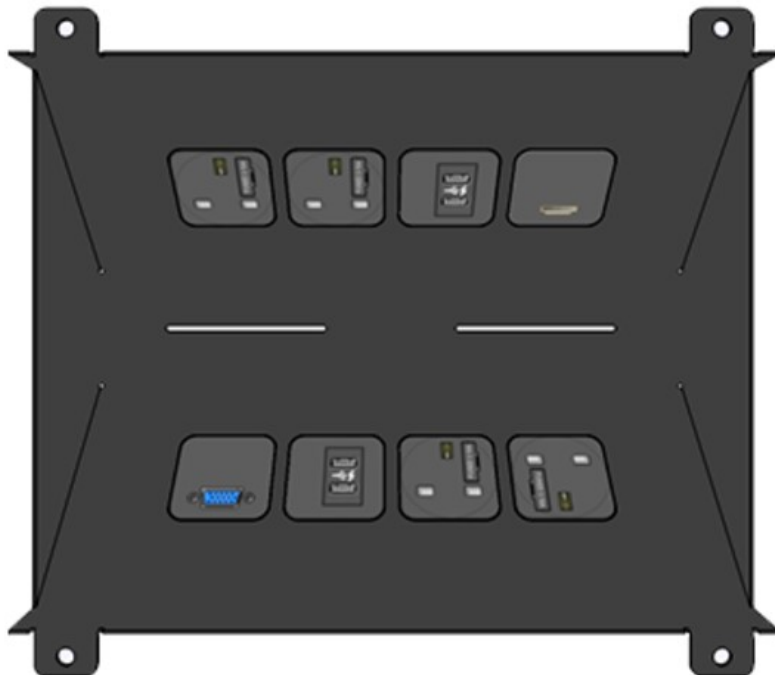

**The unit is operable from both sides, the cover is released by push-to-open mechanism and is slowed down at closing.**

**Casing:**

**The cable exit is silver.**

**Cutout dimension:**

**291,4 x 210,4 mm**

**Power supply:**

**Socket box 1 + 2: Male GST 18/3, NO output!**

**Wiring:**

**1,5 mm<sup>2</sup>**

**Fitting:**

**Socket box 1:**

**2 x GB-Y fused @ 3,15 Amps (vertical)**

**1 x USB-charging-unit 2 x female USB-connector Type A, max. output current: 2.1 A, 5 V DC (10.5 VA)**

**1 x HDMI. Input HDMI: 1 x HDMI-cable with male HDMI-connector, cable length app. 2900 mm**

**Socket box 2:**

**2 x GB-Y fused @ 3,15 Amps (vertical)**

**1 x USB-charging-unit 2 x female USB-connector Type A, max. output current: 2.1 A, 5 V DC (10.5 VA)**

**1 x VGA. Input VGA: VGA-cable with male VGA-connector, cable length app. 2900 mm**